


LDAV High Torque Automation CA Integration Kit (SDIKTM)

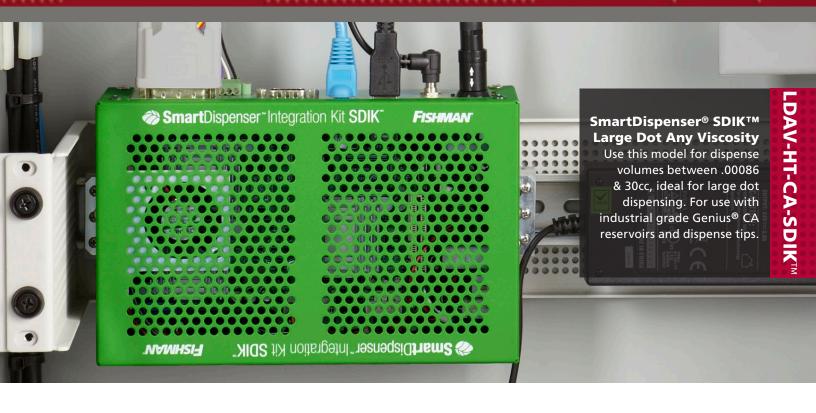


AirFree® Technology & Cyanoacrylate

Traditional air pressure systems inject moisture filled air into the syringe reservoir activating the cyanoacrylate (CA) cure cycle. AirFree® technology eliminates moisture filled air from the dispensing process protecting the CA formulation. As a secondary safeguard Genius® CA components are made from a proprietary plastics that inhibit CA bonding between components.

Total Cost of Ownership

AirFree® Technology Adds Profits When Replacing Air Driven Systems



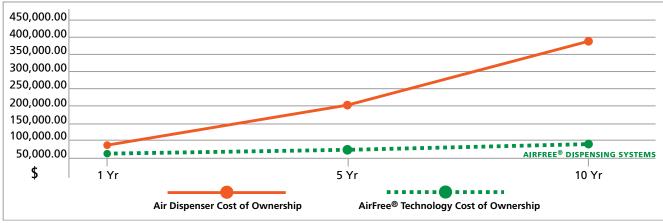





LDAV-HT-CA-SDIK™ Large Dot Any Viscosity

SYRINGE SIZE	3CC	5CC	10CC
MIN.VOL. (CC)	.00086	.00151	.00251
MAX. VOL. (CC)	3.0	5.0	10.0
MIN. RATE (CC/SEC)	.022	.038	.063
MAX. RATE (CC/SEC)	.518	.908	1.504
MAX. BACKOFF (STEPS)	500	500	500
MAX. DELAY (SEC)	9.99	9.99	9.99



The SmartDispenser® LDAV-HT-CA-SDIK™ (3-10cc) comes with 3-10cc Push-To-Connect™ Dispense Gun and 3, 5, 10cc Retaining Rings.

SYRINGE SIZE	30CC
MIN.VOL. (CC)	.00494
MAX. VOL. (CC)	30.0
MIN. RATE (CC/SEC)	.123
MAX. RATE (CC/SEC)	2.963
MAX. BACKOFF (STEPS)	500
MAX. DELAY (SEC)	9.99



The SmartDispenser® LDAV-HT-CA-SDIK™ (30cc) comes with 30cc Push-To-Connect™ Dispense Gun and 30cc Retaining Rings.


Genius® Cyanoacrylate Dispensing Components


Genius® CA dispensing components are designed from a proprietary plastic that prevents the CA from bonding the syringe piston to the syringe barrel and the syringe tip cap to the syringe luer.

Genius® CA FreeFlow™ Tips and **Teflon® Tips**

Genius® FreeFlow™ CA Tips and Teflon®* Tips both prevent CA from clogging the tip during the fluid dispensing process.

*Teflon is a registered trademark of the Dupont Corporation.







SMARTDISPENSER® LDAV-HT-CA-SDIK™ 3-30CC DISPENSE STARTER KIT CONTENTS

- Finger Switch
- USB Extension Cable
- Push-To-Connect Gun
- Video Camera
- Cisco Wireless Connectivity Device
- Needle Kit
- Manuals
- Power Supply Connection
- Universal Power Supply

















SmartDispenser® LDAV High Torque Automation CA Integration Kit (SDIKTM)



SPECIFICATIONS

Usage: Indoor use Altitude: Up to 2000m Temperature: 0° to 40° C

Maximum Relative: 80% for temperatures

up to 31° C decreasing

linearly to

50% relative humidity at 40° C **Humidity:**

Mains Supply

Voltage Fluctuations: Not to exceed ±10%

Installation

Overvoltage: Category II Pollution: Degree 2, Class 1 100-240 VAC Input Voltage:

47-63Hz

Max Inrush Current: 3.2A-1.8A **Output Voltage:** 5.0VDC Output Power: 4.6W

Fuse Rating: 1.0A/250 VAC **Initiate Circuit: PLC Input**

Drive Motor: LDAV-HT-CA-SDIK[™] 1.8 Degree

200 Steps/Rev

Axial Movement: LDAV-HT-CA-SDIK™ .096 Axial Pitch

.00048"/Step

Control Circuitry: CMOS microprocessor

Interface: DVI Monitor/Mouse/Keyboard

Minimum Dispense

Volume: 0.00086ml

CONTROL UNIT

2.95 x 7.85 x 4.94in Size:

(7.5 x 20 x 12.6cm)

Weight: 3lbs (1.36kg)

GUN

Length: 7in (17.8cm) Weight: 11oz (312gr)

30 Feet Detachable Cable Length:

(9.144m)

What makes the SmartDispenser® so smart?

The combination of 3 powerful platforms.

AIR-FREE MANUFACTURING

- One program worldwide
- Closed-loop feedback
- 6-10X more repeatable than pneumatics
- · Volume base numeric dispensing
- Positive displacement via stepper motor
- Firmware proven for over a decade · Eliminates expensive air compressor
- Designed to integrate into automation systems using PLCs

WINDOWS 7 NETWORKING

- SD Device to MES System Networking
- · Remote programming and lock out
- Real time production data
- Live video feed
- · Auto e-mail of unauthorized program changes
- On screen work instruction (audio option)
- Connectivity between SmartDispensers® Desktop, Laptop and Smartphone.
- Video/Audio training and tutorials

SMARTPHONE FUNCTIONALITY

- Touch screen
- · Finger gesturing controls
- MES Networking Apps
- Custom Manufacturing Apps

