SmartDispenser® SSDAV HIGH TORQUE BENCHTOP CA SYSTEM




SmartDispenser® Small Dot Any Viscosity Use this model for dispense volumes between .00011 & 30cc; deal for small dot and small bead ispensing. For use with industrial grade Genius® CA reservoirs and dispense tips. SSDAV-HT-CA

AirFree[®] Technology & Cyanoacrylate

Traditional air pressure systems inject moisture filled air into the syringe reservoir, activating the cyanoacrylate (CA) cure cycle. AirFree[®] technology eliminates moisture filled air from the dispensing process protecting the CA formulation. As a secondary safeguard Genius® CA components are made from proprietary plastics that inhibit CA bonding between components.

Total Cost of Ownership

AirFree® Technology Adds Profits When Replacing Air Driven Systems

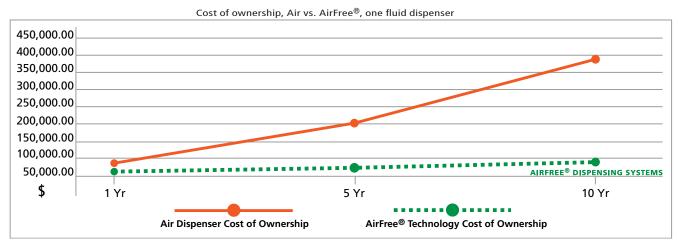

Fishman Corporation192 South Street, Hopkinton, MA01748, United StatesUS & Canada:800-433-2115| Worldwide:1-508-435-2115| www.fishmancorp.com



SmartDispenser[®] ssdav high torque benchtop ca system

SSDAV Super Small Dot – Any Viscosity

BARREL SIZE	зсс	5CC	10CC
MIN.VOL. (CC)	.00011	.00019	.00031
MAX. VOL. (CC)	3.0	5.0	10.0
MIN. RATE (CC/SEC)	.003	.005	.008
MAX. RATE (CC/SEC)	.065	.114	.188
MAX. BACKOFF (STEPS)	500	500	500
MAX. DELAY (SEC)	9.99	9.99	9.99

The SmartDispenser[®] SSDAV-LT-CA (3-10cc) comes with 3-10cc Dispense Gun and 3, 5, 10cc Retaining Rings.

BARREL SIZE	30CC
MIN.VOL. (CC)	.00062
MAX. VOL. (CC)	30.0
MIN. RATE (CC/SEC)	.015
MAX. RATE (CC/SEC)	.370
MAX. BACKOFF (STEPS)	500
MAX. DELAY (SEC)	9.99



The SmartDispenser[®] SSDAV-LT-CA (30cc) comes with 30cc Dispense Gun and 30cc Retaining Rings.


Genius[®] Cyanoacrylate Dispensing Components

Genius[®] CA dispensing components are designed from a proprietary plastic that prevents the CA from bonding the syringe piston to the syringe barrel and the syringe tip cap to the syringe luer.

Genius[®] CA FreeFlow[™] Tips and Teflon[®] Tips

Genius[®] FreeFlow[™] CA Tips and Teflon[®]* Tips both prevent CA from clogging the tip during the fluid dispensing process.

*Teflon is a registered trademark of the Dupont Corporation.



Fishman Corporation192 South Street, Hopkinton, MA01748, United StatesUS & Canada:800-433-2115 | Worldwide:1-508-435-2115 | www.fishmancorp.com



SMARTDISPENSER[®] SSDAV-LT-CA 3-30CC DISPENSE STARTER KIT CONTENTS

- Foot Pedal
- Keyboard
- Mouse
- Earphone
- Laphone
- Video Camera
- Needle KitManuals
- Power Supply Connection
- Universal Power Supply



















.....

SmartDispenser[®] ssdav high torque benchtop ca system



What makes the SmartDispenser[®] so smart? The combination of 3 powerful platforms.

AIR-FREE MANUFACTURING

- One program worldwide
- Closed-loop feedback
- 6-10X more repeatable than pneumatics
- Volume base numeric dispensing
- Positive displacement via stepper motor
- Firmware proven for over a decade
- Eliminates expensive air compressor
- Designed to integrate into automation systems using PLCs

WINDOWS 7 NETWORKING

- SD Device to MES System Networking
- Remote programming and lock out
- Real time production data
- Live video feed
- Auto e-mail of unauthorized program changes
- On screen work instruction (audio option)
- Connectivity between SmartDispensers® Desktop, Laptop and Smartphone.
- Video/Audio training and tutorials

SPECIFICATIONS	
Usage:	Indoor use
Altitude:	Up to 2000m
Temperature:	0° to 40° C
Maximum Relative:	80% for temperatures up to 31° C decreasing linearly to
Humidity:	50% relative humidity at 40° C
-	Not to exceed ±10%
Installation Overvoltage:	Category II
Pollution:	Degree 2, Class 1
Input Voltage:	100-240 VAC 47-63Hz
Max Inrush Current:	3.2A-1.8A
Output Voltage:	5.0VDC
Output Power:	4.6W
Fuse Rating:	1.0A/250 VAC
Initiate Circuit:	Foot Pedal (dry contact) finger switch
Drive Motor:	SSDAV-LT-CA .9 Degree 400 Steps/Rev
Axial Movement:	SSDAV-LT-CA .024 Axial Pitch .00006"/Step
Control Circuitry:	CMOS microprocessor
Interface:	Touch Screen or Keyboard/Mouse
Minimum Dispense Volume:	0.00011ml
CONTROL UNIT	

CONTROL UNIT	
Size:	5.6 x 9.9 x 6.3in
	(14.23 x 25.15 x 16cm)
Weight:	4.7lbs (2.13 kg)
0	
•••••	

GUN		
Length:	7in (17.8cm)	
Weight:	6oz (170.1 gr)	
Cable Length:	3 feet (91.5cm)	

SMARTPHONE FUNCTIONALITY

- Touch screen
- Finger gesturing controls
- MES Networking Apps
- Custom Manufacturing Apps



Fishman Corporation 192 South Street, Hopkinton, MA 01748, United States US & Canada: 800-433-2115 | Worldwide: 1-508-435-2115 | www.fishmancorp.com